

RHEEM ECLIPSE®

3 PHASE ELECTRIC INSTANTANEOUS
HOT WATER APPLICATIONS



ELECTRIC



ENERGY
EFFICIENT



ADJUSTABLE
TEMP DISPLAY



FLEXIBLE & FAST
INSTALLATION



SMALL
FOOTPRINT

Smart hot water system for apartments and commercial buildings.

RELIABLE AND ENERGY EFFICIENT

Rheem Eclipse® is designed as 3 Phase Electric Instantaneous system, offering sustainable and higher efficiency solution without heat loss of central storage.

THREE MEMORY MODES

Quick access to pre-set child safe or bath temperatures with touch screen display. Desired temperatures for memory modes can be adjusted via display options.


50°C AND 60°C MAXIMUM TEMPERATURE

Both 18kW and 27kW models are available in 50°C and 60°C max. output temperatures to suit site requirements.

50°C models can be installed without any further tempering in accordance with AS/NZS 3500.4 Includes trade adjustability for desired temperature at the tap in accordance with AS 3498.

MORE KEY FEATURES

- Available in 18kW and 27kW 3 phase models
- Low activation flow rate to suit low flow tapware and high ambient temperatures
- Flexible installation options with inlet and outlet fittings and electrical connection concealed through the wall or from the bottom of the water heater
- Display of water consumption and flow rate on touch screen
- Automatic sleep mode for energy savings

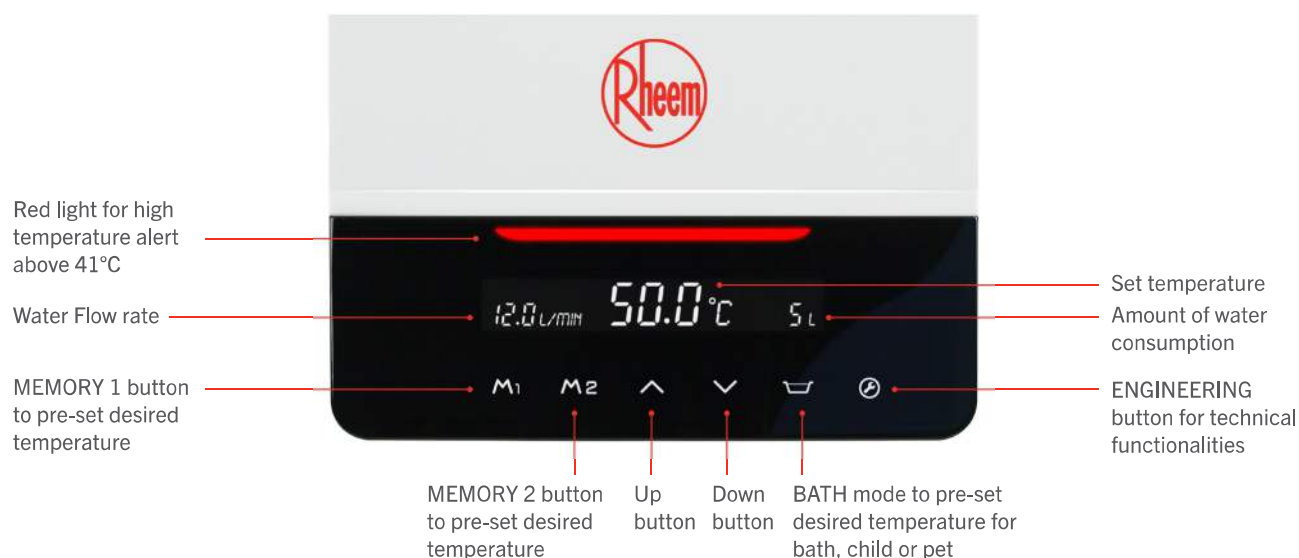

*Conditions apply: For full terms and conditions please contact Rheem or visit www.rheem.com.au/rheem/help/Warranties



TECHNICAL DATA


RHEEM ECLIPSE®				
PRODUCT NAME	18kW 50°C WATER HEATER	18kW 60°C WATER HEATER	27kW 50°C WATER HEATER	27kW 60°C WATER HEATER
Model number	6C318500A	6C318600A	6C327500A	6C327600A
Electrical Connection	380 - 415V, AC 3 Phase 3 wire and earth, 50Hz			
Rated Power (kW)	18	18	27	27
Amps/phase	26	26	37.6	37.6
Maximum Flow Rate ²	7.4 – 7.7 L/min ¹		12 L/min	
Water Connection	G1/2 Elbow / R1/2 Straight			
Minimum Activation Flow Rate	2.8 L/min			
Minimum Water Supply Pressure	100 kPa			
Maximum Water Supply Pressure	750 kPa			
Pressure Drop at 7 L/min	400 kPa		115 kPa	
Pressure Drop at 12 L/min	N/A		280 kPa	
Minimum Water Resistivity	≥800Ω.cm			
Element Nos	3	3	4	4
Element Material	Ni80Cr20			
Temperature Control Range	30 – 55°C ³	30 – 60°C	30 – 55°C ³	30 – 60°C
IP Rating	IP25			
Weight	4.5 kg			

¹ With Flow Regulator fitted at Dynamic Supply Pressure 500kPa

² At Dynamic Supply Pressure 500kPa

³ Temperatures above 50°C are trade adjustable to allow for heat losses in accordance with AS 3498

SIZING GUIDE – BASED ON LOCATION/CLIMATE ⁴			To determine the flow rate capacity of the water heater to meet a given temperature rise at 415V power supply, apply the following formula:	
Cold Water Temperature	Less than 15°C	15°C & Above	Flow rate (L/min) = $\frac{\text{kW Capacity} \times 14.3}{(\text{water heater set point} - \text{cold water temperature})}$	Example: 27kW unit producing 50°C with 15°C cold water Flow rate = $27 \times 14.3 / (50 - 15) = 11 \text{ L/min}$
Recommended Products	All 27kW Water Heaters	All 18kW & 27kW Water Heaters	Note: this is the maximum flow rate passing through the water heater to meet the set point for the given cold water temperature. Total flow rate at fixtures depends on the fixture flow rates and mixed water temperatures.	
Recommended Model Numbers	6C327500A 6C327600A	6C318500A 6C318600A 6C327500A 6C327600A	⁴ Sizing recommendation based on incoming cold water supply with water heater producing set temperature for a 9 L/min shower set at 42°C with 415V ac power supply. Deviations in cold water temperature, set point, mixed water temperature, flow rate and voltage will alter the capacity of the unit to meet demand.	

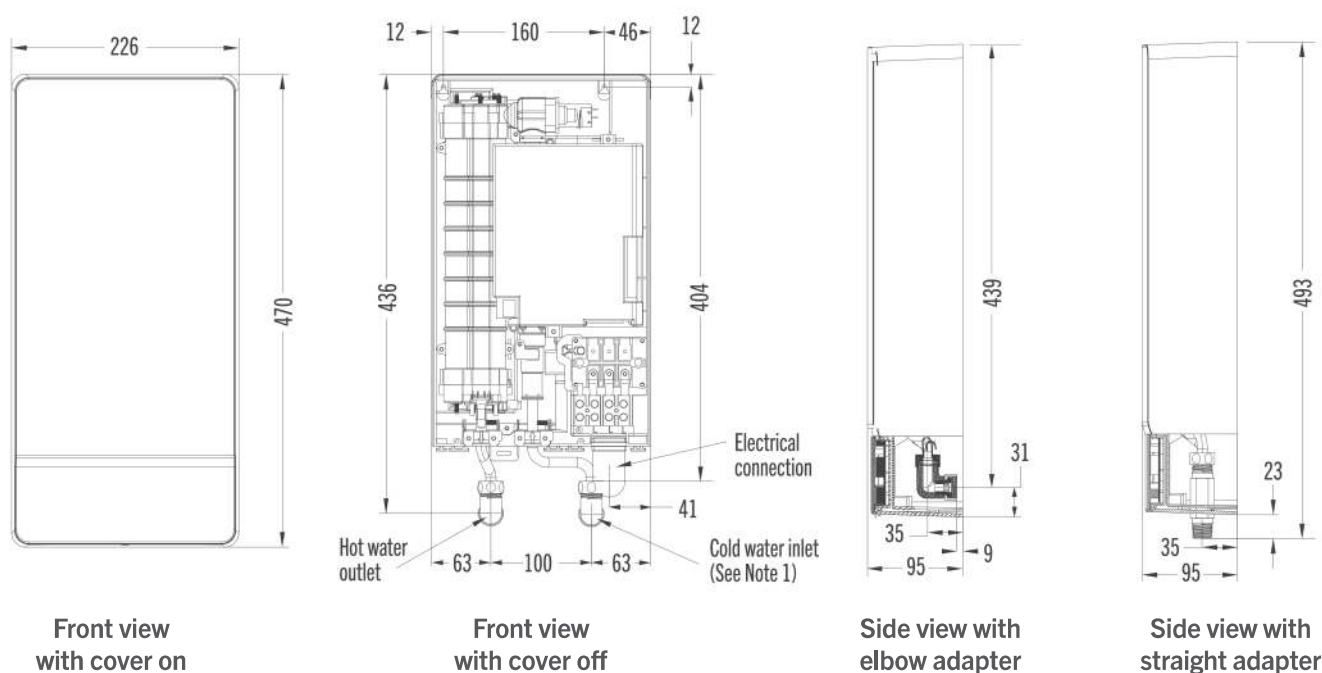

Note 1: For concealed installation, change Cold Water inlet Elbow Adapter with Rheem Isolation Valve. (PN: 080425, not supplied, to be purchased separately). For more details, see Owner's Guide or contact Rheem.



Rheem Isolation Valve

(PN: 080425, not supplied, to be purchased separately)